



BURNING HOURS
15,000 to 25,000 hrs.



TRUE COLOR
up to CRI 80



WIDE VOLTAGE RANGE
85V - 265V



LUMEN OUTPUT
up to 4,800



COST EFFICIENT



ENERGY EFFICIENT



(Prices and specifications are subject to change without prior notice)


KANTT Group Inc.

✉ salesdept@flpc.com.ph




































📘 /KanttPH


🌐 www.kanttt.com.ph

Contact Person/Agent:




CLASSIC BULBS

	Wattage	Color Temperature	Lumen Output	Life Span	Dimension	Beam Angle	Pack	Suggested Retail Price
Item Code	W	K	Lm	Hrs.	a x b (mm)	Deg.	Pcs./Ctn.	SRP (PHP)
 G45 Bulb  220 - 240 Volts  E27 LAMP BASE  80 CRI True Color								
KA-G3DL	3	6500K DAYLIGHT	317	15,000	ø45 x 78	120°	100	65.00
KA-G4DL	4	6500K DAYLIGHT	360	15,000	ø45 x 78	120°	100	75.00
KA-G3WW	3	3000K WARM WHITE	270	15,000	ø45 x 78	120°	100	65.00
KA-G4WW	4	3000K WARM WHITE	340	15,000	ø45 x 78	120°	100	75.00
 Classic A-50 Series  220 - 240 Volts  E27 LAMP BASE  80 CRI True Color								
KA-A5DL	5	6500K DAYLIGHT	450	25,000	ø50 X 88	200°	100	80.00
KA-A5WW	5	3000K WARM WHITE	450	25,000	ø50 X 88	200°	100	80.00
 Classic A-55 Series  220 - 240 Volts  E27 LAMP BASE  80 CRI True Color								
KA-A7DL	7	6500K DAYLIGHT	630	25,000	ø55 X 99	200°	100	110.00
KA-A7WW	7	3000K WARM WHITE	637	25,000	ø55 X 99	200°	100	110.00
 Classic A-60 Series  220 - 240 Volts  E27 LAMP BASE  80 CRI True Color								
KA-A9DL	9	6500K DAYLIGHT	810	25,000	ø60 X 106	200°	100	125.00
KA-A9WW	9	3000K WARM WHITE	918	25,000	ø60 X 106	200°	100	125.00
KA-A11DL	11	6500K DAYLIGHT	1122	25,000	ø60 X 109	200°	100	160.00
KA-A11WW	11	3000K WARM WHITE	990	25,000	ø60 X 109	200°	100	160.00
KA-A13DL	13	6500K DAYLIGHT	1362	25,000	ø60 X 116	200°	100	180.00
KA-A13WW	13	3000K WARM WHITE	1362	25,000	ø60 X 116	200°	100	180.00
KA-A15DL	15	6500K DAYLIGHT	1350	25,000	ø60 X 118	200°	100	230.00
KA-A15WW	15	3000K WARM WHITE	1350	25,000	ø60 X 118	200°	100	230.00
 Classic A-70 Series  220 - 240 Volts  E27 LAMP BASE  80 CRI True Color								
KA-A18DL	18	6500K DAYLIGHT	2034	25,000	ø70 X 137	200°	50	250.00
KA-A18WW	18	3000K WARM WHITE	1836	25,000	ø70 X 137	200°	50	250.00
 C37 Bulb  220 - 240 Volts  80 CRI True Color								
KA-E14-C4DL	E14 4	6500K DAYLIGHT	340	15,000	ø37 x 100	180°	200	75.00
KA-E14-C4WW	E14 4	3000K WARM WHITE	340	15,000	ø37 x 100	180°	200	75.00
KA-C4DL	E27 4	6500K DAYLIGHT	340	15,000	ø37 x 100	180°	100	75.00
KA-C4WW	E27 4	3000K WARM WHITE	340	15,000	ø37 x 100	180°	100	75.00
KA-C6DL	E27 6	6500K DAYLIGHT	540	15,000	ø37 x 100	180°	100	100.00
KA-C6WW	E27 6	3000K WARM WHITE	540	15,000	ø37 x 100	180°	100	100.00
 Stick Bulb  220 - 240 Volts  E27 LAMP BASE  80 CRI True Color								
KA-STB6DL	6	6500K DAYLIGHT	600	20,000	ø32 x 100	180°	100	180.00
KA-STB12DL	12	6500K DAYLIGHT	1,200	25,000	ø43 x 135	180°	100	370.00
 T-Bulb  220 - 240 Volts  E27 LAMP BASE  80 CRI True Color								
KA-T20DL	20	6500K DAYLIGHT	1,800	25,000	ø80 x 119	200°	50	305.00
KA-T20WW	20	3000K WARM WHITE	1,800	25,000	ø80 x 119	200°	50	305.00
KA-T30DL	30	6500K DAYLIGHT	2,700	25,000	ø100 x 172	200°	40	460.00
KA-T40DL	40	6500K DAYLIGHT	3,600	25,000	ø120 x 198	200°	40	650.00
KA-T50DL	50	6500K DAYLIGHT	4,500	25,000	ø138 x 235	200°	20	800.00
 Globe Bulb  220 - 240 Volts  E27 LAMP BASE  80 CRI True Color								
KA-GLOB12DL	12	6500K DAYLIGHT	1,140	25,000	ø95 x 140	270°	25	260.00
KA-GLOB18DL	18	6500K DAYLIGHT	1,600	25,000	ø120 x 157	270°	25	400.00




SPECIALTY LIGHTS

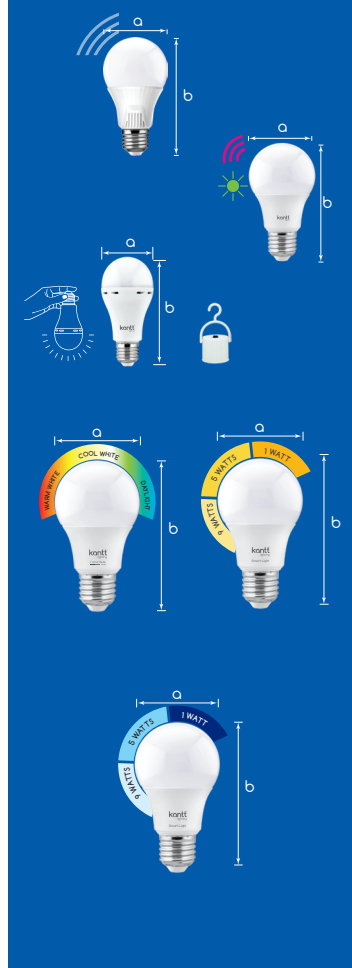


Item Code	Wattage W	Color Temperature K	Lumen Output Lm	Life Span Hrs.	Dimension a x b (mm)	Beam Angle Deg.	Pack Pcs./Ctn.	Suggested Retail Price SRP
Motion Sensor								
KA-MSB9WDL	9	6500K DAYLIGHT	810	25,000	ø60 x 111	300°	100	290.00
Light+Motion Sensor								
KA-SLM9WDL	9	6500K DAYLIGHT	810	25,000	ø60 x 111	300°	100	380.00
Emergency Bulb								
KA-EB7DL	7	6500K DAYLIGHT	630	15,000	ø60 x 125	120°	50	350.00
3NI Lights								
3 Color Bulb								
KA-3NI-5W	5	6500K DAYLIGHT 4000K COOL DAYLIGHT 3000K WARM WHITE	470	25,000	ø60 x 108	200°	50	180.00
KA-3NI-9W	9	6500K DAYLIGHT 4000K COOL DAYLIGHT 3000K WARM WHITE	810	25,000	ø60 x 113	200°	50	200.00
3 Step Dimming								
KA-3SD9DL	9 5 1	6500K DAYLIGHT 6500K DAYLIGHT 6500K DAYLIGHT	810 450 135	25,000	ø60 x 111	200°	50	200.00
KA-3SD9WW	9 5 1	3000K WARM WHITE 3000K WARM WHITE 3000K WARM WHITE	810 450 135	25,000	ø60 x 111	200°	50	200.00
KA-3SD15DL	15 7 1.7	6500K DAYLIGHT 6500K DAYLIGHT 6500K DAYLIGHT	1300 700 200	25,000	ø60 x 129	200°	50	330.00
KA-3SD15WW	15 7 1.7	3000K WARM WHITE 3000K WARM WHITE 3000K WARM WHITE	1350 700 200	25,000	ø60 x 129	200°	50	330.00

FILAMENT BULBS

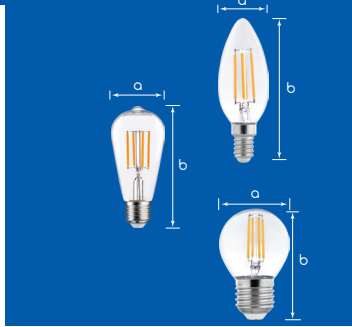


Candle Bulb								
KA-FBCE14-4WW	4	2700K WARM WHITE	490	15,000	ø35 x 98	320°	100	150.00
Pear-Shaped Bulb								
KA-FBST64-7WW	7	2700K WARM WHITE	750	15,000	ø64 x 145	320°	50	260.00
Globe Bulb								
KA-FBGE27-4WW	4	2700K WARM WHITE	470	15,000	ø45 x 77	320°	100	150.00

PANEL LIGHTS

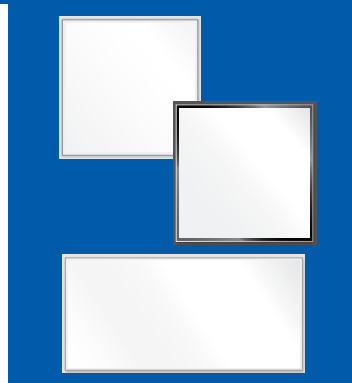

KA-PNLS40WDL	40	6500K DAYLIGHT	3800	15,000	600 x 600	120°	6	1,920.00
KA-PNLBS40WDL	40	6500K DAYLIGHT	3800	15,000	600 x 600	120°	6	1,920.00
KA-PNLR40WDL	40	6500K DAYLIGHT	3500	15,000	600 x 300	120°	10	1,670.00



CEILING LIGHTS

Item Code	Wattage W	Color Temperature K	Lumen Output Lm	Life Span Hrs.	Dimension a x b (mm)	Beam Angle Deg.	Recessed Cut-out mm.	Pack Pcs./Ctn.	Suggested Retail Price SRP (PHP)
-----------	--------------	------------------------	--------------------	-------------------	-------------------------	--------------------	-------------------------	-------------------	-------------------------------------



Slim Round									
KA-SLDR3DL	3	6500K DAYLIGHT	270	25,000	ø90 x 25.8	120°	ø75	60	170.00
KA-SLDR3CDL	3	4000K COOL DAYLIGHT	270	25,000	ø90 x 25.8	120°	ø75	60	170.00
KA-SLDR3WW	3	3000K WARM WHITE	270	25,000	ø90 x 25.8	120°	ø75	60	170.00
KA-SLDR6DL	6	6500K DAYLIGHT	600	25,000	ø117 x 25.8	120°	ø105	40	250.00
KA-SLDR6CDL	6	4000K COOL DAYLIGHT	600	25,000	ø117 x 25.8	120°	ø105	40	250.00
KA-SLDR6WW	6	3000K WARM WHITE	600	25,000	ø117 x 25.8	120°	ø105	40	250.00
KA-SLDR9DL	9	6500K DAYLIGHT	900	25,000	ø147 x 25.8	120°	ø130	40	290.00
KA-SLDR9CDL	9	4000K COOL DAYLIGHT	900	25,000	ø147 x 25.8	120°	ø130	40	290.00
KA-SLDR9WW	9	3000K WARM WHITE	900	25,000	ø147 x 25.8	120°	ø130	40	290.00
KA-SLDR12DL	12	6500K DAYLIGHT	1200	25,000	ø167 x 25.8	120°	ø150	20	380.00
KA-SLDR12CDL	12	4000K COOL DAYLIGHT	1200	25,000	ø167 x 25.8	120°	ø150	20	380.00
KA-SLDR12WW	12	3000K WARM WHITE	1200	25,000	ø167 x 25.8	120°	ø150	20	380.00
KA-SLDR18DL	18	6500K DAYLIGHT	1800	25,000	ø225 x 25.8	120°	ø200	20	480.00
KA-SLDR18CDL	18	4000K COOL DAYLIGHT	1800	25,000	ø225 x 25.8	120°	ø200	20	480.00
KA-SLDR18WW	18	3000K WARM WHITE	1800	25,000	ø225 x 25.8	120°	ø200	20	480.00
KA-BSLDR6DL	6	6500K DAYLIGHT	600	25,000	ø117 x 25.8	120°	ø105	40	250.00

Surface Round									
KA-SFDR6DL	6	6500K DAYLIGHT	600	25,000	ø120 x 34.8	120°	----	40	320.00
KA-SFDR6WW	6	3000K WARM WHITE	600	25,000	ø120 x 34.8	120°	----	40	320.00
KA-SFDRI2DL	12	6500K DAYLIGHT	1200	25,000	ø170 x 34.8	120°	----	20	440.00
KA-SFDRI2WW	12	3000K WARM WHITE	1200	25,000	ø170 x 34.8	120°	----	20	440.00
KA-SFDR18DL	18	6500K DAYLIGHT	1800	25,000	ø225 x 34.8	120°	----	20	590.00
KA-SFDR18WW	18	3000K WARM WHITE	1800	25,000	ø225 x 34.8	120°	----	20	590.00

Slim Square									
KA-SLDS3DL	3	6500K DAYLIGHT	270	25,000	90 x 90 x 25.8	120°	75 x 75	60	170.00
KA-SLDS3CDL	3	4000K COOL DAYLIGHT	270	25,000	90 x 90 x 25.8	120°	75 x 75	60	170.00
KA-SLDS3WW	3	3000K WARM WHITE	270	25,000	90 x 90 x 25.8	120°	75 x 75	60	170.00
KA-SLDS6DL	6	6500K DAYLIGHT	600	25,000	117 x 117 x 25.8	120°	105 x 105	40	250.00
KA-SLDS6CDL	6	4000K COOL DAYLIGHT	600	25,000	117 x 117 x 25.8	120°	105 x 105	40	250.00
KA-SLDS6WW	6	3000K WARM WHITE	600	25,000	117 x 117 x 25.8	120°	105 x 105	40	250.00
KA-SLDS9DL	9	6500K DAYLIGHT	900	25,000	147 x 147 x 25.8	120°	130 x 130	40	290.00
KA-SLDS9CDL	9	4000K COOL DAYLIGHT	900	25,000	147 x 147 x 25.8	120°	130 x 130	40	290.00
KA-SLDS9WW	9	3000K WARM WHITE	900	25,000	147 x 147 x 25.8	120°	130 x 130	40	290.00
KA-SLDS12DL	12	6500K DAYLIGHT	1200	25,000	167 x 167 x 25.8	120°	150 x 150	20	380.00
KA-SLDS12CDL	12	4000K COOL DAYLIGHT	1200	25,000	167 x 167 x 25.8	120°	150 x 150	20	380.00
KA-SLDS12WW	12	3000K WARM WHITE	1200	25,000	167 x 167 x 25.8	120°	150 x 150	20	380.00
KA-SLDS18DL	18	6500K DAYLIGHT	1800	25,000	222 x 222 x 25.8	120°	200 x 200	20	480.00
KA-SLDS18CDL	18	4000K COOL DAYLIGHT	1800	25,000	222 x 222 x 25.8	120°	200 x 200	20	480.00
KA-SLDS18WW	18	3000K WARM WHITE	1800	25,000	222 x 222 x 25.8	120°	200 x 200	20	480.00

Surface Square									
KA-SFDS6DL	6	6500K DAYLIGHT	600	25,000	120 x 120 x 34.8	120°	----	40	320.00
KA-SFDS6WW	6	3000K WARM WHITE	600	25,000	120 x 120 x 34.8	120°	----	40	320.00
KA-SFDS12DL	12	6500K DAYLIGHT	1200	25,000	170 x 170 x 34.8	120°	----	20	440.00
KA-SFDS12WW	12	3000K WARM WHITE	1200	25,000	170 x 170 x 34.8	120°	----	20	440.00
KA-SFDS18DL	18	6500K DAYLIGHT	1800	25,000	225 x 225 x 34.8	120°	----	20	590.00
KA-SFDS18WW	18	3000K WARM WHITE	1800	25,000	225 x 225 x 34.8	120°	----	20	590.00


Ceiling Light									
KA-CL18DL	18	6500K DAYLIGHT	1800	15,000	ø330 x 50	180°	20	650.00	

CEILING LIGHTS ACCESSORIES




Pin Light									
KA-PNL12DL (white)	12	6000K DAYLIGHT	960	15,000	ø108 x 128	60°	40	590.00	
KA-PNL30DL (white)	30	6000K DAYLIGHT	2500	15,000	ø192 x 195	60°	18	980.00	
KA-BPNL12DL (black)	12	6000K DAYLIGHT	960	15,000	ø108 x 128	60°	40	625.00	

Bulb Housing									
	LAMP BASE								
KA-PNLH (white)		NA	NA	NA	ø108 x 128	NA	40	270.00	
KA-BPNLH (black)		NA	NA	NA	ø108 x 128	NA	40	270.00	
KA-BSLHMR (black)		NA	NA	NA	ø108 x 128	NA	50	300.00	
KA-BSLHGU (black)		NA	NA	NA	ø108 x 128	NA	50	300.00	



CEILING LIGHTS (SPECIALTY)

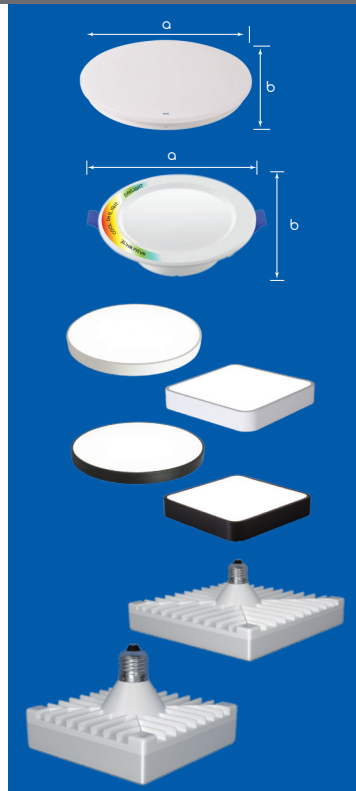

	Wattage	Color Temperature	Lumen Output	Life Span	Dimension	Beam Angle	recessed Cut-out	Pack	Suggested Retail Price
Item Code	W	K	Lm	Hrs.	a x b (mm)	Deg.	mm.	Pcs./Ctn.	SRP (PHP)
Ceiling Light									
KA-3N1-CL18W	18	3000K - 6500K	1600 - 1800	15,000	ø330 x 50	180°	20	20	950.00
3 Color Slim Downlight									
KA-3N1-DOL13W	3	3000K - 6500K	280	25,000	ø75 x 38 hole 55 x 80	120°	100	100	145.00
KA-3N1-DOL16W	6	3000K - 6500K	560	25,000	ø100 x 44	120°	80	80	295.00
KA-3N1-DOL110W	10	3000K - 6500K	800	25,000	ø116 x 52	120°	80	80	320.00
3 Color Ceiling Lights									
KA-3N1-CLS1WR-18W	18	3000K - 6500K	1600 - 1800	15,000	ø300 x 50	180°	20	20	1,290.00
KA-3N1-CLS2WS-18W	18	3000K - 6500K	1600 - 1800	15,000	300 x 300 x 50	180°	20	20	1,380.00
KA-3N1-CLS1BR-18W	18	3000K - 6500K	1600 - 1800	15,000	ø300 x 50	180°	20	20	1,290.00
KA-3N1-CLS2BS-18W	18	3000K - 6500K	1600 - 1800	15,000	300 x 300 x 50	180°	20	20	1,380.00
3N1 Square Lamp									
KA-UFO30W3N1	30	3000K - 6500K	3,000	25,000	85 x 55 x 35	120°	50	50	950.00
Square Lamp									
KA-UFO30WDL	30	6500K	3,000	25,000	69.5 x 52 x 29	120°	50	50	700.00

ACDC BULBS




	Wattage	Color Temperature	Lumen Output	Life Span	Dimension	Beam Angle	Pack	Suggested Retail Price
ACDC BULB								
KA-ACDC9DL	9	6500K	720	25,000	ø60 x 108	200°	100	195.00
ACDC BULB								
KA-ACDC12DL	12	6500K	960	25,000	ø65 x 128	200°	100	235.00

SOLAR LIGHTS



	Wattage	Color Temperature	Battery Power	Charging Time	Lasting Time	Solar Panel Dimensions	Pack	Suggested Retail Price
Floodlights								
KA-SFL40WDL	40	6500K DAYLIGHT	3.2v/5Ah	4-6 hrs.	10-12 hrs.	235 x 350 x 17	10	1,870.00
KA-SFL100WDL	100	6500K DAYLIGHT	3.2v/12Ah	4-6 hrs.	10-12 hrs.	350 x 350 x 17	5	3,350.00
KA-SFL200WDL	200	6500K DAYLIGHT	3.2v/20Ah	6 hrs.	10-12 hrs.	530 x 350 x 17	5	5,250.00
Street Lights								
KA-SSL40WDL	40	6500K DAYLIGHT	3.2v	5-8 hrs.	8-12 hrs.	380 x 170	5	3,995.00
KA-SSL60WDL	60	6500K DAYLIGHT	3.2v	5-8 hrs.	8-12 hrs.	600 x 190 60	5	4,700.00
KA-SSL200WDL	200	6500K DAYLIGHT	3.2v	4-6 hrs.	10-12 hrs.	800 x 245 x 66	5	7,580.00
Portable Solar Emergency Floodlight								
KA-FLPMP100W	100	6500K DAYLIGHT	3.7v	5-8 hrs.	5-6 hrs.	260 x 220 x 400	10	2,850.00
Solar Rechargeable Floodlight Heavy Duty								
KA-FLIP100W	100	6500K DAYLIGHT	3.2v	5-8 hrs.	10 hrs.	180 x 220 x 335	8	3,550.00



SPOTLIGHT BULB




Item Code	Wattage W	Color Temperature K	Lumen Output Lm	Life Span Hrs.	Dimension a x b (mm)	Beam Angle Deg.	Pack Pcs./Ctn.	Suggested Retail Price SRP	
Integrated Spotlight		220 - 240 Volts	3000k - 6500k	80 CRI True Color	Body Size Cut Hole				
KA-ISL5DL	5	6500K DAYLIGHT	425	25,000	ø95 x 27	ø75-80	38° 100	190.00	
KA-ISL5WW	5	3000K WARM WHITE	425	25,000	ø95 x 27	ø75-80	38° 100	190.00	
Round Frame For MR16 & GU10		for 5watts			ø90 x 27	ø75-80	100	150.00	
GU10 Connector									25.00
MR16 Connector									25.00
PAR Lamps		220 - 240 Volts	3000k - 6500k	80 CRI True Color					
KA-PAR30L12DL	12	6500K DAYLIGHT	1080	25,000	ø95 x 120	38°	50	440.00	
KA-PAR38L18DL	18	6500K DAYLIGHT	1450	25,000	ø120 x 135	38°	30	600.00	
COB Spot Downlight		220 - 240 Volts	3000k - 6500k	80 CRI True Color					
KA-SPTDLT7DL	7	6500K DAYLIGHT	560	25,000	ø95 x 60, hole 80	24°	100	270.00	
KA-SPTDLT9DL	9	6500K DAYLIGHT	720	25,000	ø120 x 74, hole 100	24°	50	430.00	
KA-SPTDLT12DL	12	6500K DAYLIGHT	960	25,000	ø140 x 90, hole 120	24°	50	740.00	
KA-SPTDLT7WW	7	3000K WARM WHITE	560	25,000	ø95 x 60, hole 80	24°	100	270.00	
KA-SPTDLT9WW	9	3000K WARM WHITE	720	25,000	ø120 x 74, hole 100	24°	50	430.00	
KA-SPTDLT12WW	12	3000K WARM WHITE	960	25,000	ø140 x 90, hole 120	24°	50	740.00	
MR16 Spotlight Bulb		220 - 240 Volts	3000k - 6500k	80 CRI True Color					
KA-SPTLT5DL	5	6500K DAYLIGHT	400	25,000	ø50 x 51	38°	100	120.00	
KA-SPTLT5CDL	5	4000K COOL DAYLIGHT	400	25,000	ø50 x 51	38°	100	120.00	
KA-SPTLT5WW	5	3000K WARM WHITE	400	25,000	ø50 x 51	38°	100	120.00	
KA-3NI-SPTLT5W	5	3000K - 6500K	400	25,000	ø50 x 51	38°	120	195.00	
GU10 Spotlight Bulb		220 - 240 Volts	3000k - 6500k	80 CRI True Color					
KA-GU105DL	5	6500K DAYLIGHT	400	25,000	ø50 x 53	38°	120	120.00	
KA-GU105WW	5	3000K WARM WHITE	400	25,000	ø50 x 53	38°	120	120.00	
KA-3NI-GU105W	5	3000K - 6500K	400	25,000	ø50 x 53	38°	120	195.00	


LED STRIP LIGHTS



Item Code	Wattage W	Color Temperature K	Lumen Output Lm	Life Span Hrs.	Dimension a x b (mm)	Beam Angle Deg.	Pack Pcs./Ctn.	Suggested Retail Price SRP	
Strip Lights		220 - 240 Volts	3000k - 6500k	80 CRI True Color	Water/Dust Resistant	IP65 RATING			
KA-STR1PL8DL	8	6500K DAYLIGHT	650	25,000	8mm width x 50m/roll		1	5,975.00	
KA-STR1PLM8DL	8	6500K DAYLIGHT	650	25,000	8mm width x 1 meter		1	125.00	
KA-STR1PL8WW	8	3000K WARMWHITE	650	25,000	8mm width x 50m/roll		1	5,975.00	
KA-STR1PLM8WW	8	3000K WARMWHITE	650	25,000	8mm width x 1 meter		1	125.00	
KA-STR1PL8RGB	8	3000K - 6500K	650	25,000	8mm width x 50m/roll		1	8,980.00	
KA-STR1PLM8RGB	8	3000K - 6500K	650	25,000	8mm width x 1 meter		1	190.00	
Power Supply and Remote									430.00
15A Cable Plug connector				10mm	(20pcs/bundle)	(5 bundles/carton)	195.00		
Connector				10mm/12mm	(100pcs/bag)	(5 bags/carton)	29.00		
End Cap				10mm/12mm	(100pcs/bag)	(40 bags/carton)	10.00		
Bracket				10mm/12mm	(100pcs/bag)	(30 bags/carton)	10.00		




TUBES

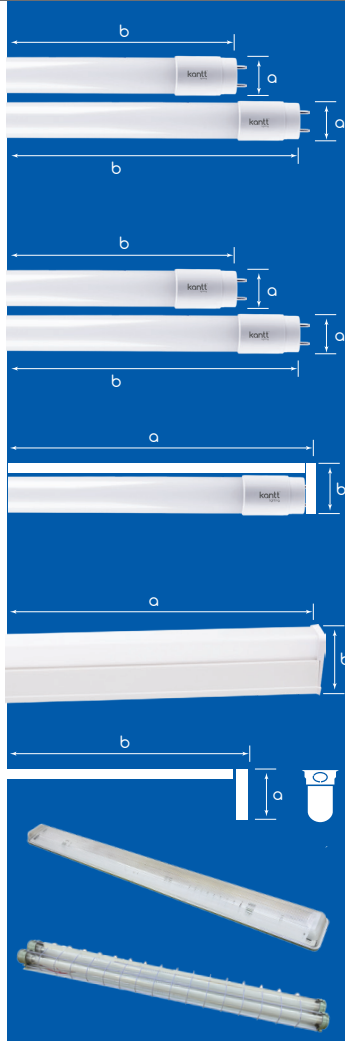


	Wattage	Color Temperature	Lumen Output	Life Span	Dimension	Beam Angle	Pack	Suggested Retail Price
Item Code	W	K	Lm	Hrs.	a x b (mm)	Deg.	Pcs./Ctn.	SRP
T8 (Plastic Tube)		SINGLE-ENDED POWER		175-265 Volts	80 True Color			
KA-T8P9DL-SE	9	6500K DAYLIGHT	900	15,000	26 x 600	320°	25	215.00
KA-T8P18DL-SE	18	6500K DAYLIGHT	1800	15,000	26 x 1,200	320°	25	295.00
T8 (Glass Tube)								
KA-T8G9DL-SE	9	6500K DAYLIGHT	900	15,000	26 x 600	320°	25	165.00
KA-T8G18DL-SE	18	6500K DAYLIGHT	1800	15,000	26 x 1,200	320°	25	235.00
T8 (Plastic Tube)		DOUBLE-ENDED POWER		175-265 Volts	80 True Color			
KA-T8P9DL-DE	9	6500K DAYLIGHT	900	15,000	26 x 600	320°	25	215.00
KA-T8P18DL-DE	18	6500K DAYLIGHT	1800	15,000	26 x 1,200	320°	25	295.00
T8 (Glass Tube)								
KA-T8G9DL-DE	9	6500K DAYLIGHT	900	15,000	26 x 600	320°	25	165.00
KA-T8G18DL-DE	18	6500K DAYLIGHT	1800	15,000	26 x 1,200	320°	25	235.00
T8 with Fixture		175-265 Volts	w/ Tube Holder	80 True Color	SINGLE-ENDED POWER			
KA-T8GF9DL	9	6500K DAYLIGHT	900	15,000	611 x 32 x 45	320°	25	240.00
KA-T8GF18DL	18	6500K DAYLIGHT	1800	15,000	1222 x 32 x 45	320°	25	300.00
T5 Integrated Tube		165 - 265 Volts		80 True Color	DOUBLE-ENDED POWER			
KA-T5IT8DL	8	6500K DAYLIGHT	700	15,000	573 x 24 x 32	220°	50	220.00
KA-T5IT16DL	16	6500K DAYLIGHT	1600	15,000	1173 x 24 x 32	220°	50	260.00
KA-T5IT8CDL	8	4000K COOL DAYLIGHT	700	15,000	573 x 24 x 32	220°	50	220.00
KA-T5IT16CDL	16	4000K COOL DAYLIGHT	1600	15,000	1173 x 24 x 32	220°	50	260.00
KA-T5IT8WW	8	3000K WARM WHITE	700	15,000	573 x 24 x 32	220°	50	220.00
KA-T5IT16WW	16	3000K WARM WHITE	1600	15,000	1173 x 24 x 32	220°	50	260.00
T8 Tube Holder (Single-Ended Power)		for 9watts			26 x 600		30	90.00
		for 18watts			26 x 1,200		30	110.00
INDUSTRIAL (Single-Ended)								
Tri-Proof Tube Housing								
KA-TRIPRF		N/L single-ended connection, 1.2m *2 tubes (not included) (for 18watts only)			1270 x 120 x 60		8	850.00
Explosion Proof Tube Housing								
KA-EXNPRF		N/L single-ended connection, 1.2m *2 tubes (not included) (for 18watts only)			1250 x 1145 x 85		2	1,700.00


EMERGENCY LIGHTS

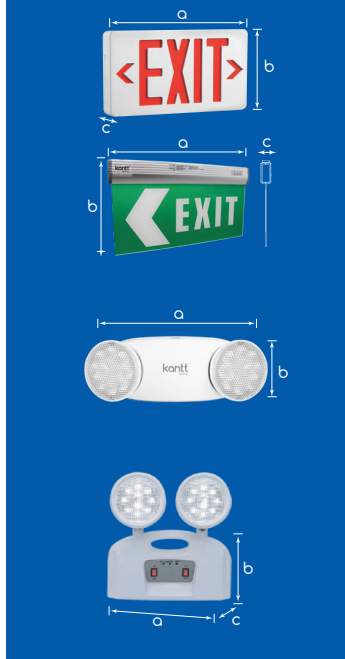

	LED Output	Battery Output	Ampere	Life Span	Dimension	Pack	Suggested Retail Price
Item Code	W	Ah/mAh	Hrs.	a x b x c (mm)	Pcs./Ctn.	SRP	
LED Exit Sign		86-265 Volts	Ni-Cd Battery type	0°C-40°C Operating Temperature	24 hours Charging Time	2 hours Discharge Time	
KA-EXSGRM1	3	2.4V	300mAh	25,000	300 x 185 x 46	20	1,250.00
KA-EXSREM1	3	2.4V	300mAh	25,000	300 x 185 x 46	20	1,250.00
Emergency Exit							
KA-EXSGLM1 (Right)	3	1.2V	600mAh	25,000	360 x 200 x 28	20	1,050.00
KA-EXSGLM1 (Left)	3	1.2V	600mAh	25,000	360 x 200 x 28	20	1,050.00
Automatic Emergency Light		220 - 240 Volts	Li-Ion Battery type	0°C-40°C Operating Temperature	24 hours Charging Time	2 hours Discharge Time	
KA-EMLIGAM1	2	4V	2Ah	25,000	235 x 105 x 68	20	1,095.00
KA-EMLIGAM2	4	3.6V	800mAh	25,000	310 x 140 x 92	10	1,750.00
Rechargeable Emergency Light							
KA-EMLIINM1	6	3.7V	2000mAh	25,000	278 x 280 x 67	10	1,420.00



OUTDOOR LIGHTS

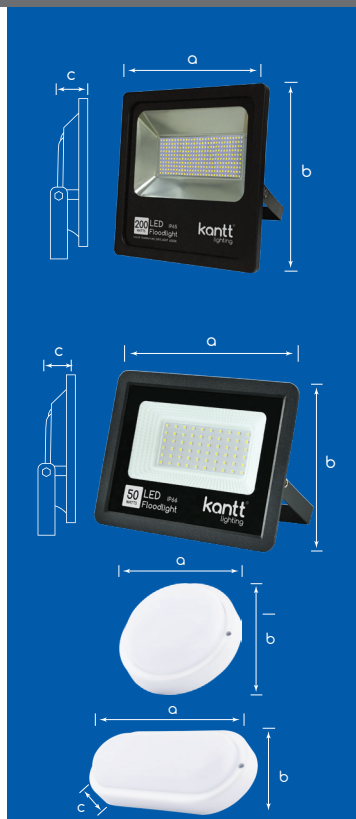

Item Code		Wattage	Color Temperature	Lumen Output	Life Span	Dimension	Beam Angle	Pack	Suggested Retail Price
		W	K	Lm	Hrs.	a x b x c (mm)	Deg.	Pcs./Ctn.	SRP
Floodlight		PREMIUM SERIES							
KA-FL10DL	10	6500K	DAYLIGHT	900	20,000	128 x 120 x 43	120°	30	490.00
KA-FL10WW	10	3000K	WARM WHITE	900	20,000	128 x 120 x 43	120°	30	490.00
KA-FL20DL	20	6500K	DAYLIGHT	1800	20,000	184 x 180 x 45	120°	20	750.00
KA-FL20WW	20	3000K	WARM WHITE	1800	20,000	184 x 180 x 45	120°	20	750.00
KA-FL30DL	30	6500K	DAYLIGHT	3,000	20,000	226 x 221 x 53	120°	15	1,050.00
KA-FL30WW	30	3000K	WARM WHITE	3,000	20,000	226 x 221 x 53	120°	15	1,050.00
KA-FL50DL	50	6500K	DAYLIGHT	5,000	20,000	285 x 275 x 66	120°	10	1,500.00
KA-FL50WW	50	3000K	WARM WHITE	5,000	20,000	285 x 275 x 66	120°	10	1,500.00
KA-FL100DL	100	6500K	DAYLIGHT	8,000	20,000	293 x 293 x 80	120°	5	2,800.00
KA-FL100WW	100	3000K	WARM WHITE	8,000	20,000	293 x 293 x 80	120°	5	2,800.00
KA-FL150DL	150	6500K	DAYLIGHT	12,000	20,000	336 x 317 x 85	120°	1	4,650.00
KA-FL150WW	150	3000K	WARM WHITE	12,000	20,000	336 x 317 x 85	120°	1	4,650.00
KA-FL200DL	200	6500K	DAYLIGHT	16,000	20,000	385 x 395 x 110	120°	1	7,000.00
KA-FL200WW	200	3000K	WARM WHITE	16,000	20,000	385 x 395 x 110	120°	1	7,000.00
Floodlight		ECONOMY SERIES							
KA-FL10EDL	10	6500K	DAYLIGHT	800	20,000	99 X 74 X 34	120°	50	360.00
KA-FL10EWW	10	3000K	WARM WHITE	800	20,000	99 X 74 X 34	120°	50	360.00
KA-FL20EDL	20	6500K	DAYLIGHT	1600	20,000	120 X 95 X 35	120°	60	610.00
KA-FL20EWW	20	3000K	WARM WHITE	1600	20,000	120 X 95 X 35	120°	60	610.00
KA-FL30EDL	30	6500K	DAYLIGHT	2,400	20,000	161 X 121 X 35	120°	40	920.00
KA-FL30EWW	30	3000K	WARM WHITE	2,400	20,000	161 X 121 X 35	120°	40	920.00
KA-FL50EDL	50	6500K	DAYLIGHT	4,000	20,000	208 X 160 X 30	120°	40	1,210.00
KA-FL50EWW	50	3000K	WARM WHITE	4,000	20,000	208 X 160 X 30	120°	40	1,210.00
Round Wall Lamp									
KA-WALIR12DL	12	6500K	DAYLIGHT	960	15,000	ø175 x 50	200°	40	300.00
Oval Wall Lamp									
KA-WALIO12CDL	12	4000K	COOL DAYLIGHT	960	15,000	199 x 97 x 46	200°	40	300.00

SMART LED LIGHTS



	SMART FILAMENT BULB	RGB SMART BULB	RGBWW LED strips
ITEM CODE	KA-AKIN-SMBFL6W	KA-AKIN-SMBU9W	KA-AKIN-SMSL68W
GLASS/COATING TYPE	Clear	N/A	N/A
LED CHIP	SMD LED	SMD LED	24pcs. 5050RGB+ 24pcs. 2835 per meter
DESCRIPTION	WI-FI Brightness	WI-FI RGB+CCT	WI-FI RGBWW
POWER CONSUMPTION	6W	9W	68W
COLOR TEMPERATURE	2700 Kelvin	RGB 2700K to 6500K	RGBWW 3000K to 6500K
DIMMABLE	Yes	Yes	Yes
CRI (RA)	>80Ra	>80Ra	>80Ra
PF	>0.5	>0.8	>0.5
STABLE LUMEN	650LM +/- 10%	900LM +/- 10%	1650L
LIFE SPAN	15,000 hrs.	15,000 hrs.	15,000 hrs.
BASE	E27	E27	N/A
BEAM ANGLE	360 degrees	360 degrees	N/A
VOLTAGE	220-240V	220-240V	100-240V / 12DC 2A
LAMP SIZE	60 x 115mm	60 x 120mm	12mm x 5m
PACK	100	100	20 (5 meters per pack)
SUGGESTED RETAIL PRICE	720.00	750.00	2,350.00

Cutting Reminder
(RGBWW LED strips)



Cut only within this area